


HST[®]

 **Artificial
Intelligence**



SMART CCTV

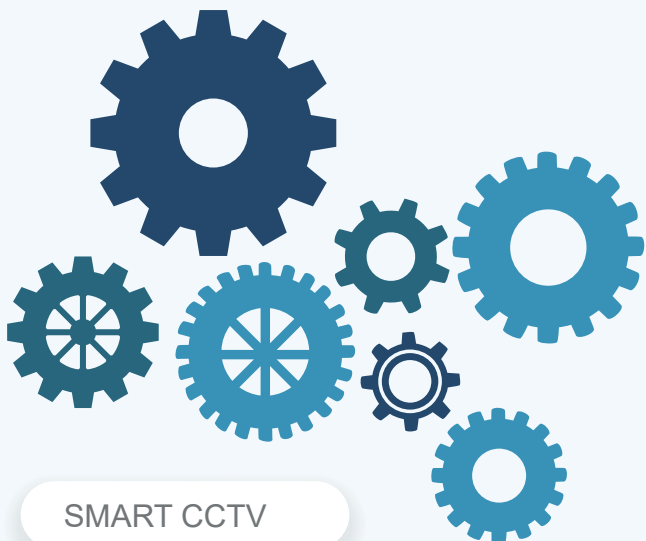

Model : HST-D3104HR-N



Model		HST-D3104HR-N
Video Compression		H.265/H.264
Video System		NTSC/PAL
Operation System		Linux(embedded)
Analog video-input /output		4CH inputs / VGA and HDMI output
IP Video Input		2ch,(only IP up to 6ch)
Composite Video Input		up to 6ch (Analog video + IP video)
Audio input /output		4CH inputs /1CH output(RCA)
Display	resolution	4K Model: Analog : 8MP (15fps) 5MP (20fps) 4MP/3MP/1080P/720P/960H (30fps) IP : 4MP/3MP/1080P/720P 5MP Model: Analog :5MP (20fps) 4MP/3MP(30fps) 1080P/720P/960H IP :4MP/3MP/1080P/720P
Record	resolution	Analog :8MP/5MP/4MP/3MP/1080P/720P/960H IP :4MP/3MP/1080P/720P
	speed	4K Model: Analog :8MP:6fps(each ch) 5MP:8fps(each ch) 4MP:10fps(each ch) 3MP:12fps(each ch) 1080P:PAL:25fps(each ch)/NTSC:30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch) 5MP Model: Analog :5MP:12fps(each ch) 4MP:15fps(each ch) 3MP:20fps(each ch) 1080P:PAL:25fps(each ch)/NTSC:30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch)
IP-Recording Bandwidth (Maximum input Bandwidth)		16Mbps ~48Mbps
Maximum output Bandwidth		48Mbps
Maximum decode performance		1080P:120fps
Synchronous Playback		4CH
Network Type		Lan, DHCP, and DDNS
HDD interface		1SATA HDD, up to 6TB
Multiplex Operation		live display, record, playback, backup and network
USB		2xUSB(for mouse and backup/upgrade)
Sensor & Alarm I/O		no
PTZ Control		yes (RS485)
Mobile Surveillance		Support Mobile Phones based on iPhone and Android operation system
VGA/HDMI		1024*768,1280*720,1280*1024,1440*900,1920*1080(1080P),2560*1440(2K),3840*2160(4K)
Power Supply		DC 12V/2A