


# HST<sup>®</sup>

 **Artificial  
Intelligence**



SMART CCTV

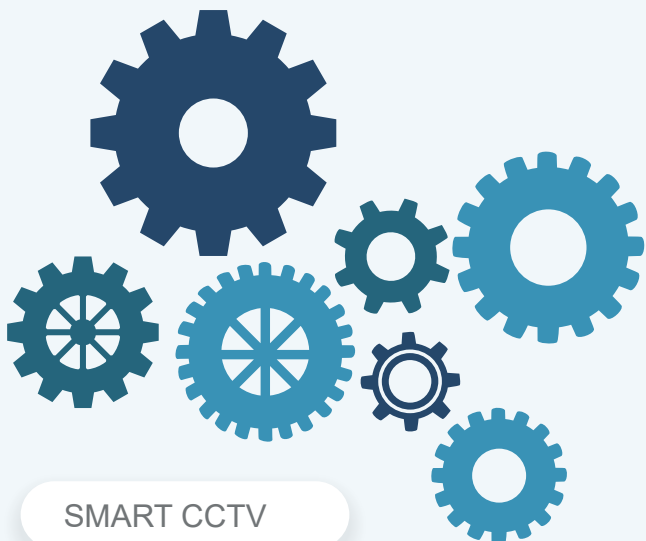

# Model : HST-D4104HR-N



Model	HST-D4104HR-N	
Video Compression	H.265/H.264	
Video System	NTSC/PAL	
Operation System	Linux(embedded)	
Analog video-input /output	4CH inputs / VGA and HDMI output	
IP Video Input	2ch,(only IP up to 6ch)	
Composite Video Input	up to 6ch (Analog video + IP video)	
Audio input /output	4CH inputs /1CH output(RCA)	
Display	resolution	Analog : 5MP-Lite:20fps 4MP-Lite:30 fps 3MP:18fps 1080P/720P/960H:30fps IP : 5MP/4MP/3MP1080P/720P
Record	resolution	Analog : 5MP-Lite/4MP-Lite/3MP/1080P/720P/960H IP : 5MP/4MP/3MP1080P/720P
	speed	Analog : 5MP-Lite:12fps (each ch) 4MP-Lite:14fps(each ch)- 3MP:9fps(each ch) 1080P:13fps(each ch) 720P:PAL:25fps(each ch)/NTSC::30fps(each ch) IP : PAL:25fps(each ch)/NTSC: 30fps(each ch)
IP-Recording Bandwidth (Maximum input)	8Mbps ~24Mbps	
Maximum output Bandwidth	32Mbps	
Maximum decode performance	1080P:52fps	
Synchronous Playback	4CH	
Network Type	Lan, DHCP, and DDNS	
HDD interface	1SATA HDD, up to 6TB	
Multiplex Operation	live display, record, playback, backup and network	
USB	2xUSB(for mouse and backup/upgrade)	
Sensor & Alarm I/O	no	
PTZ Control	yes (RS485)	
Mobile Surveillance	Support Mobile Phones based on iPhone and Android operation system	
VGA/HDMI	1024*768,1280*720,1280*1024,1440*900,1920*1080(1080P),2560*1440(2K),3840*2160(4K)	
Power Supply	DC 12V/2A	